CIRCUIT DIAGRAM FOR COBRA 78X

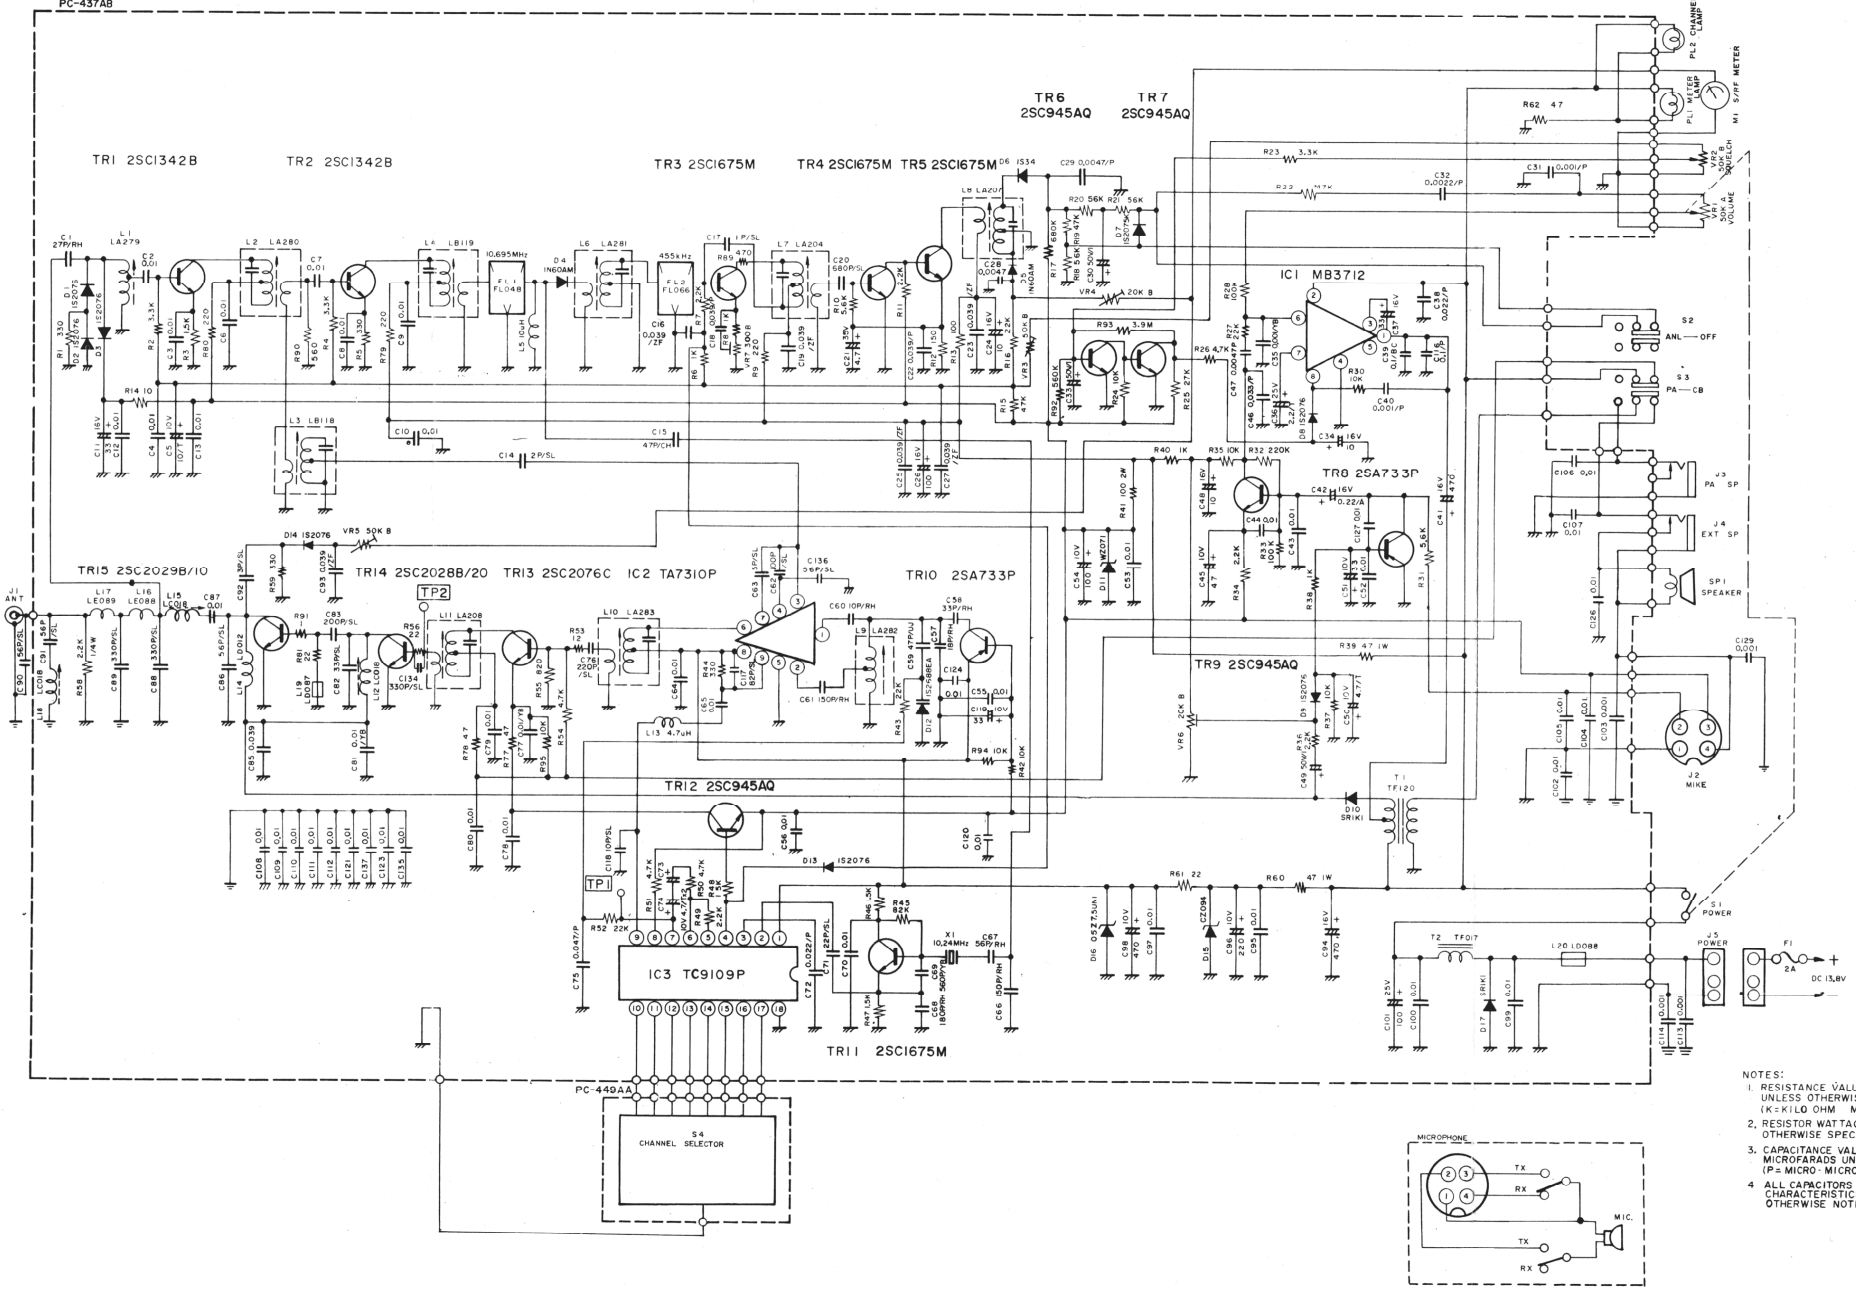

NOTES:

1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K = KILO OHM M = MEG OHM)
2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE SPECIFIED.
3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTERWISE SPECIFIED. (P = MICRO - MICROFARAD)
4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE YG UNLESS OTHERWISE NOTED.