


WX RF AMP. AND FIRST MIXER AREA

WX DC CTL

SOUND-TRACK SYSTEM

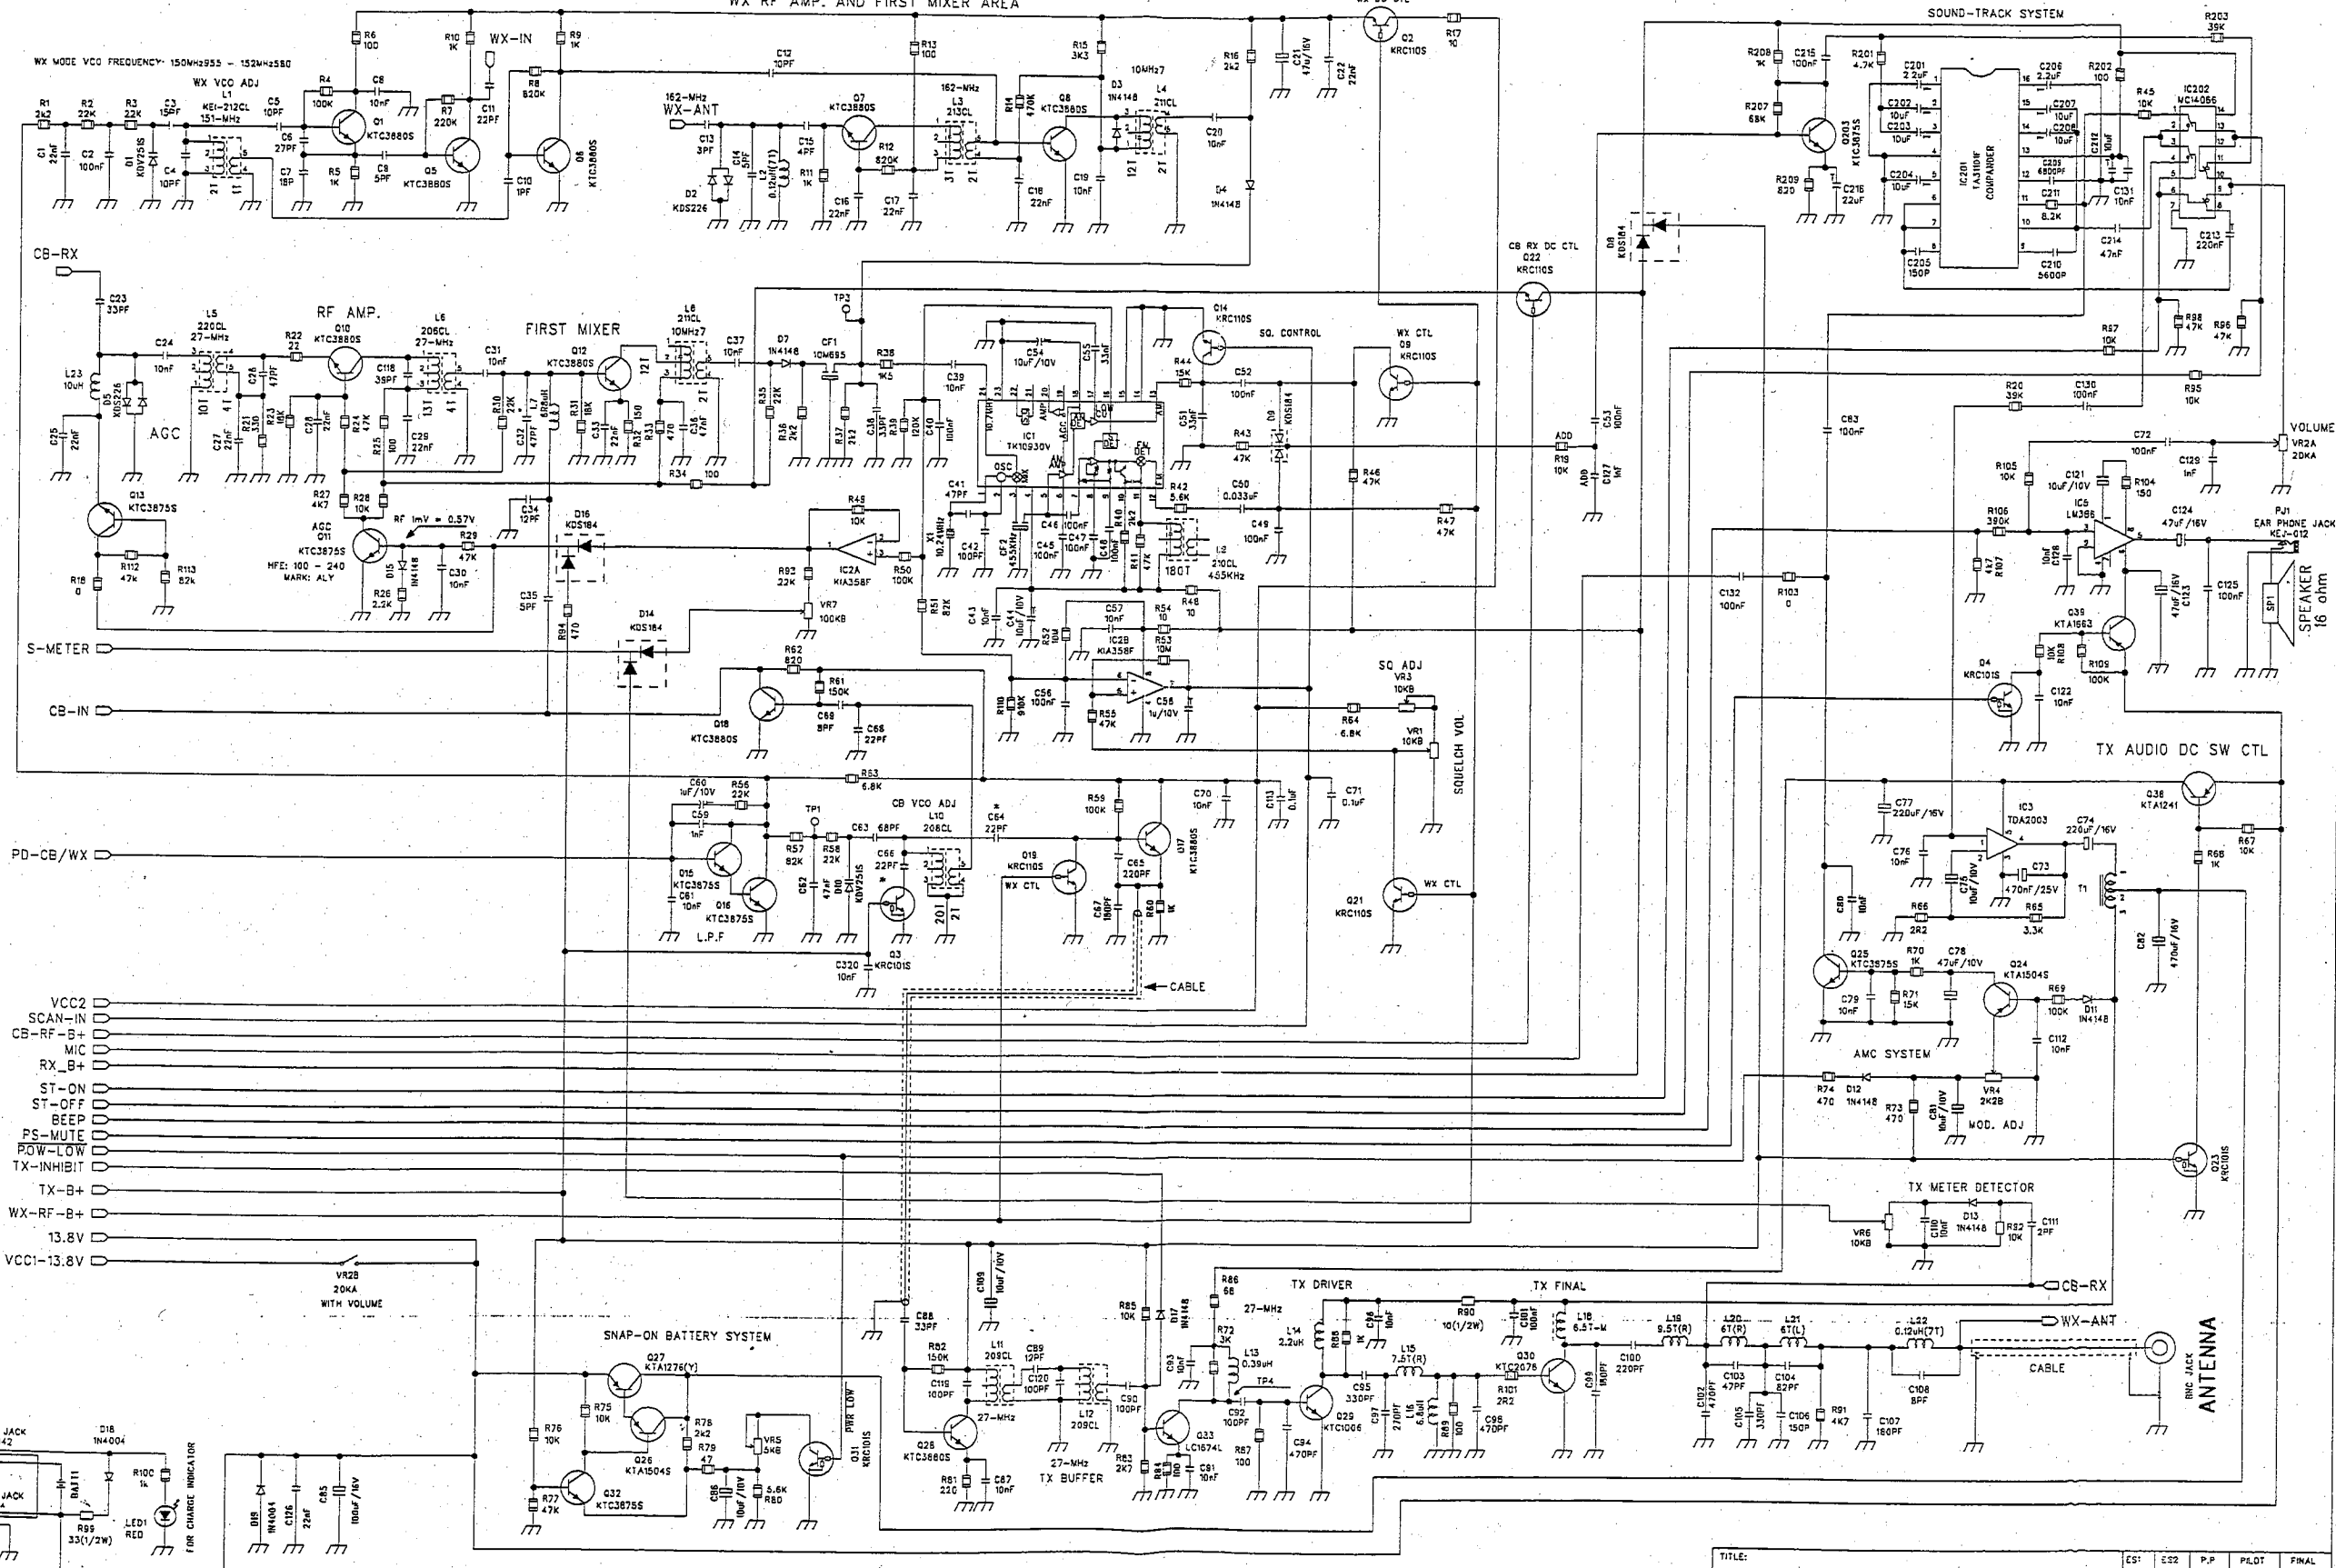

- VCC2
- SCAN-IN
- CB-RF-B+
- MIC
- RX-B+
- ST-ON
- ST-OFF
- BEEP
- PS-MUTE
- PDW-LOW
- TX-INHIBIT
- TX-B+
- WX-RF-B+
- 13.8V
- VCC1-13.8V

TITLE:		ES1	ES2	P.P	PLDT	FINAL
CIRCUIT DIAGRAM FOR COBRA HH38WX-ST		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
DRAWN:	DATE:	SHEET:	VER:			
XW PENG	AUG-28-95	1 OF 2	B			
APPROVED BY:	DATE:	UPDATE:	F.L.C. NAME:			
		DEC.05.1999	HX38WX-ST			

Cobra Electronics

HH38WX-ST CIRCUIT DIAGRAM FOR COBRA ----- SHEETS 2 OF 2

LCD SECTION

ANISISTOR MARK:
 TC3880S:AGG
 TC3875S:ALG
 TA1504S:ASY
 RA105S:PE
 RC105S:NK
 RC101S:NA

