


## VIDEO TIPS (Cont.)

### . . Set-up Diagram . .

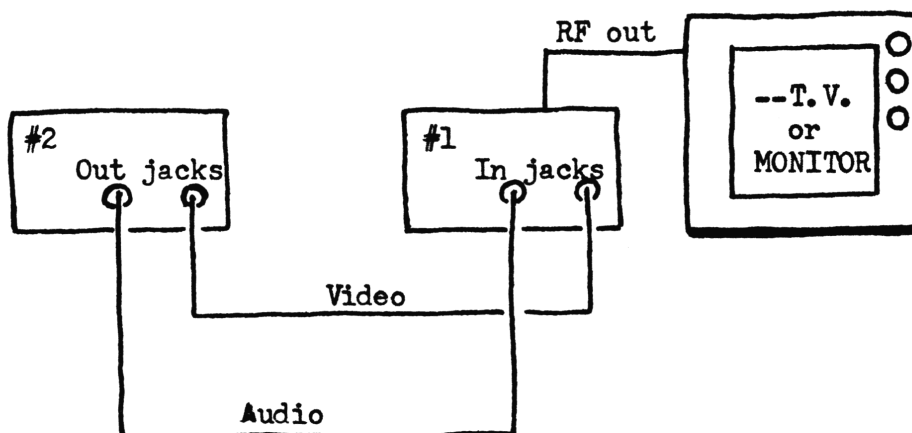

Another note on these cables is: not CHEAP, but worth the cost!  
\$9.88 for 6' and \$10.22 for 10' - EACH! Don't bundle up after  
buying them; stretch out flat for couple of days; store when not  
in use in a wide loop, and in large sealable plastic bag.

Are best investment you could make for use with your VCR....

.....\*We can supply these on special order, but do not stock at  
present time. If demand is sufficient, will in the future.....

---

### SPECIFIC TUNE-UPS

Sears 934.38060700 (861 PLL)..Use SAMS-236, 934.38062700

Be careful working on this unit - the slugs in TX section have square  
holes and very easily broken....

TX - Peak T11, T12, T13, T14, T15

RT-1, Mixer Gain

RT-2, S Meter adjust

RT-3, RF Meter adjust

\*There is no AMC adjust; remove D-7; replace with solid buss wire.

If final is blown - don't skimp - replace with 2SC1306!

Midland 1001 (77-001) and Midland 103M (77-103) IC7131-PLL

TX - Peak L205, L-204, L-206, L-207, L-203

RX - L101, L102, L103, L104

RV102 - S Meter adjust. RV103 - Squelch Range adjust

RV202 - RF Meter adjust. RV201 - Modulation adjust (Q106-defeat)

\* SELMAN ENTERPRISES